



**Installation:** Safe Area

**Classification:** I



**LIGHTING FIXTURES**

**CEI / IEC**

EXECUTION	INDOOR LIGHTING
RULES OF COMPLIANCE	EN 60598-1 + A1;
EC Type-Examination Certificate	-
PROTECTION DEGREE	IP20 / IP40
AMBIENT TEMPERATURE	-

**Mechanical characteristics**

Body	sheet steel
Optical diff	transparent methacrilate diffuser - white panted metal sheet frame
Optical par	"Darklight" - preanodised 99.85 aluminium double parabolic with 4u oxidation layer antiglare and antiridescent
Painting	epoxy-polyester powder coated in white
Gasket	anti-age cellular structure

**Electrical characteristics**

Power supply	electronic ballast 220/240V 50/60Hz p.f. corrected (cos $\rho \geq 0,98$ )
Lampholders	bi-pin G13 cap
Internal wiring	high temperature resistant silicon rubber insulation cables
Terminals	suitable up to 4sq/mm cables



**On Request Accessories:**

- Electronic ballast with voltage suppli different than standard
- Emergency unit with charger and battery pack
- Available with LED lamp

Technical data



CODE	LAMP TYPE	TEMPERATURE CLASS (GAS)	TEMPERATURE CLASS (DUSTS)	LAMPHOLDER	CABLE ENTRY	DETAIL
<b>FLUORESCENT LIGHTING FIXTURES WITH DARKLIGHT OPTICAL - POWER SUPPLY 230V-50Hz</b>						
OFFICE-PAR-136	1 x 36W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-PAR-158	1 x 58W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-PAR-218	2 x 18W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-PAR-236	2 x 36W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-PAR-258	2 x 58W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-PAR-418	4 x 18W	-	-	G13	CABLE GLAND Ø20mm	A
<b>FLUORESCENT LIGHTING FIXTURES WITH METHACRILATE DIFFUSER - POWER SUPPLY 230V-50Hz</b>						
OFFICE-DIFF-218	2 x 18W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-DIFF-236	2 x 36W	-	-	G13	CABLE GLAND Ø20mm	A
OFFICE-DIFF-418	4 x 18W	-	-	G13	CABLE GLAND Ø20mm	A

Technical features

CODE	A [mm]	B [mm]	C [mm]	FIXING [mm]	WEIGHT [Kg]	CABLE ENTRY	DETAIL
OFFICE-(1)-136	1225	180	90	1023 x 90	3,8	CABLE GLAND Ø20mm	A
OFFICE-(1)-158	1525	180	90	1323 x 90	4,9	CABLE GLAND Ø20mm	A
OFFICE-(1)-218	618	306	90	414 x 130	3,3	CABLE GLAND Ø20mm	A
OFFICE-(1)-236	1225	306	90	1023 x 130	6,2	CABLE GLAND Ø20mm	A
OFFICE-(1)-258	1525	306	90	1323 x 130	8,0	CABLE GLAND Ø20mm	A
OFFICE-(1)-418	618	610	90	414 x 496	5,7	CABLE GLAND Ø20mm	A

(1) OPTICAL / DIFFUSER: PAR = DARKLIGHT - DIFF= TRANSPARENT METHACRILATE

Reference details

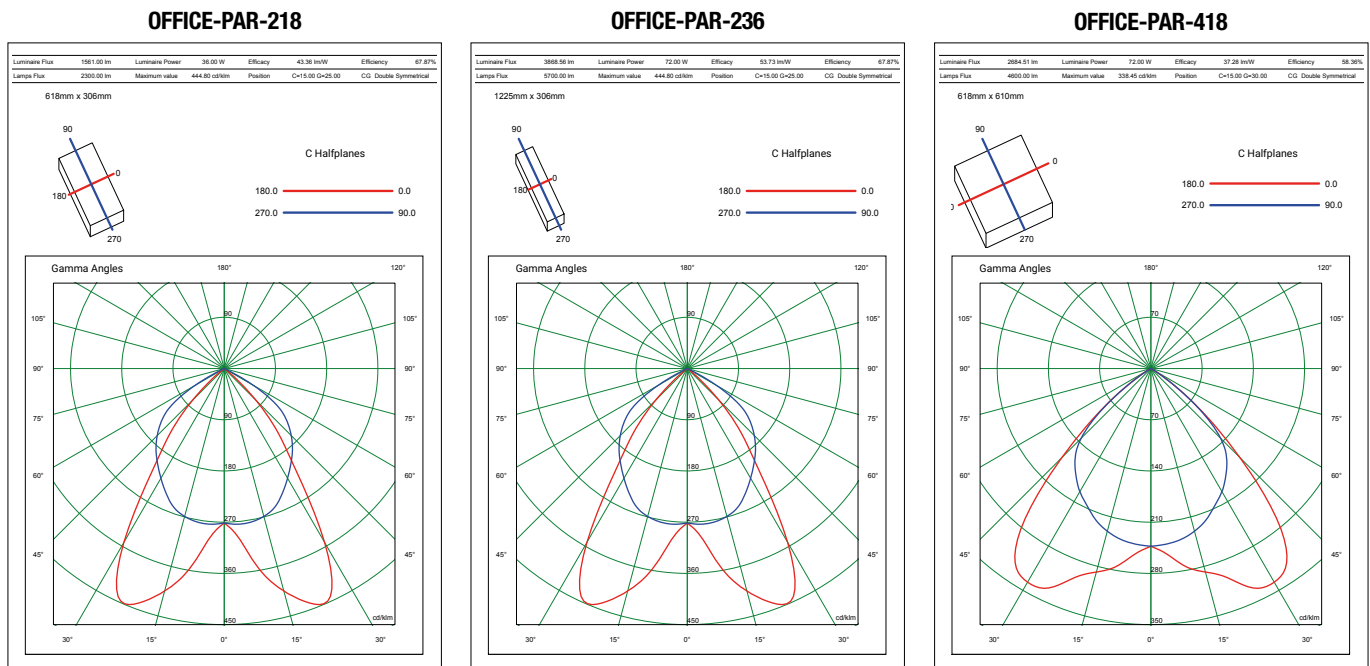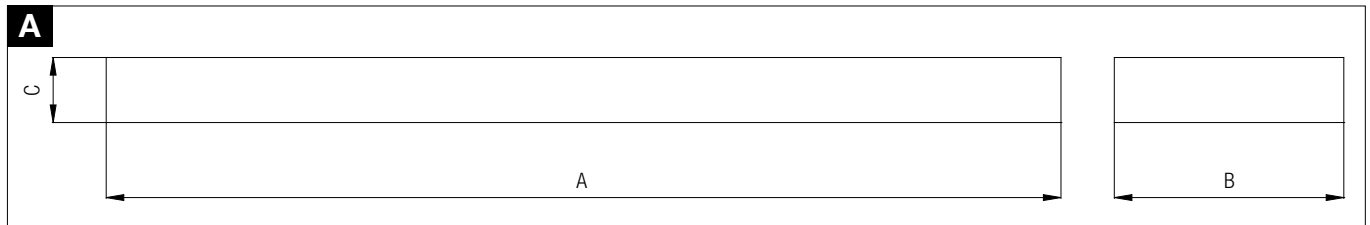

REMARK:

Due to the development of the national and international specifications and of the technology, the above technical characteristics showed on this bulletin can be considered as binding on our confirmation only.

